




TRANE[®]

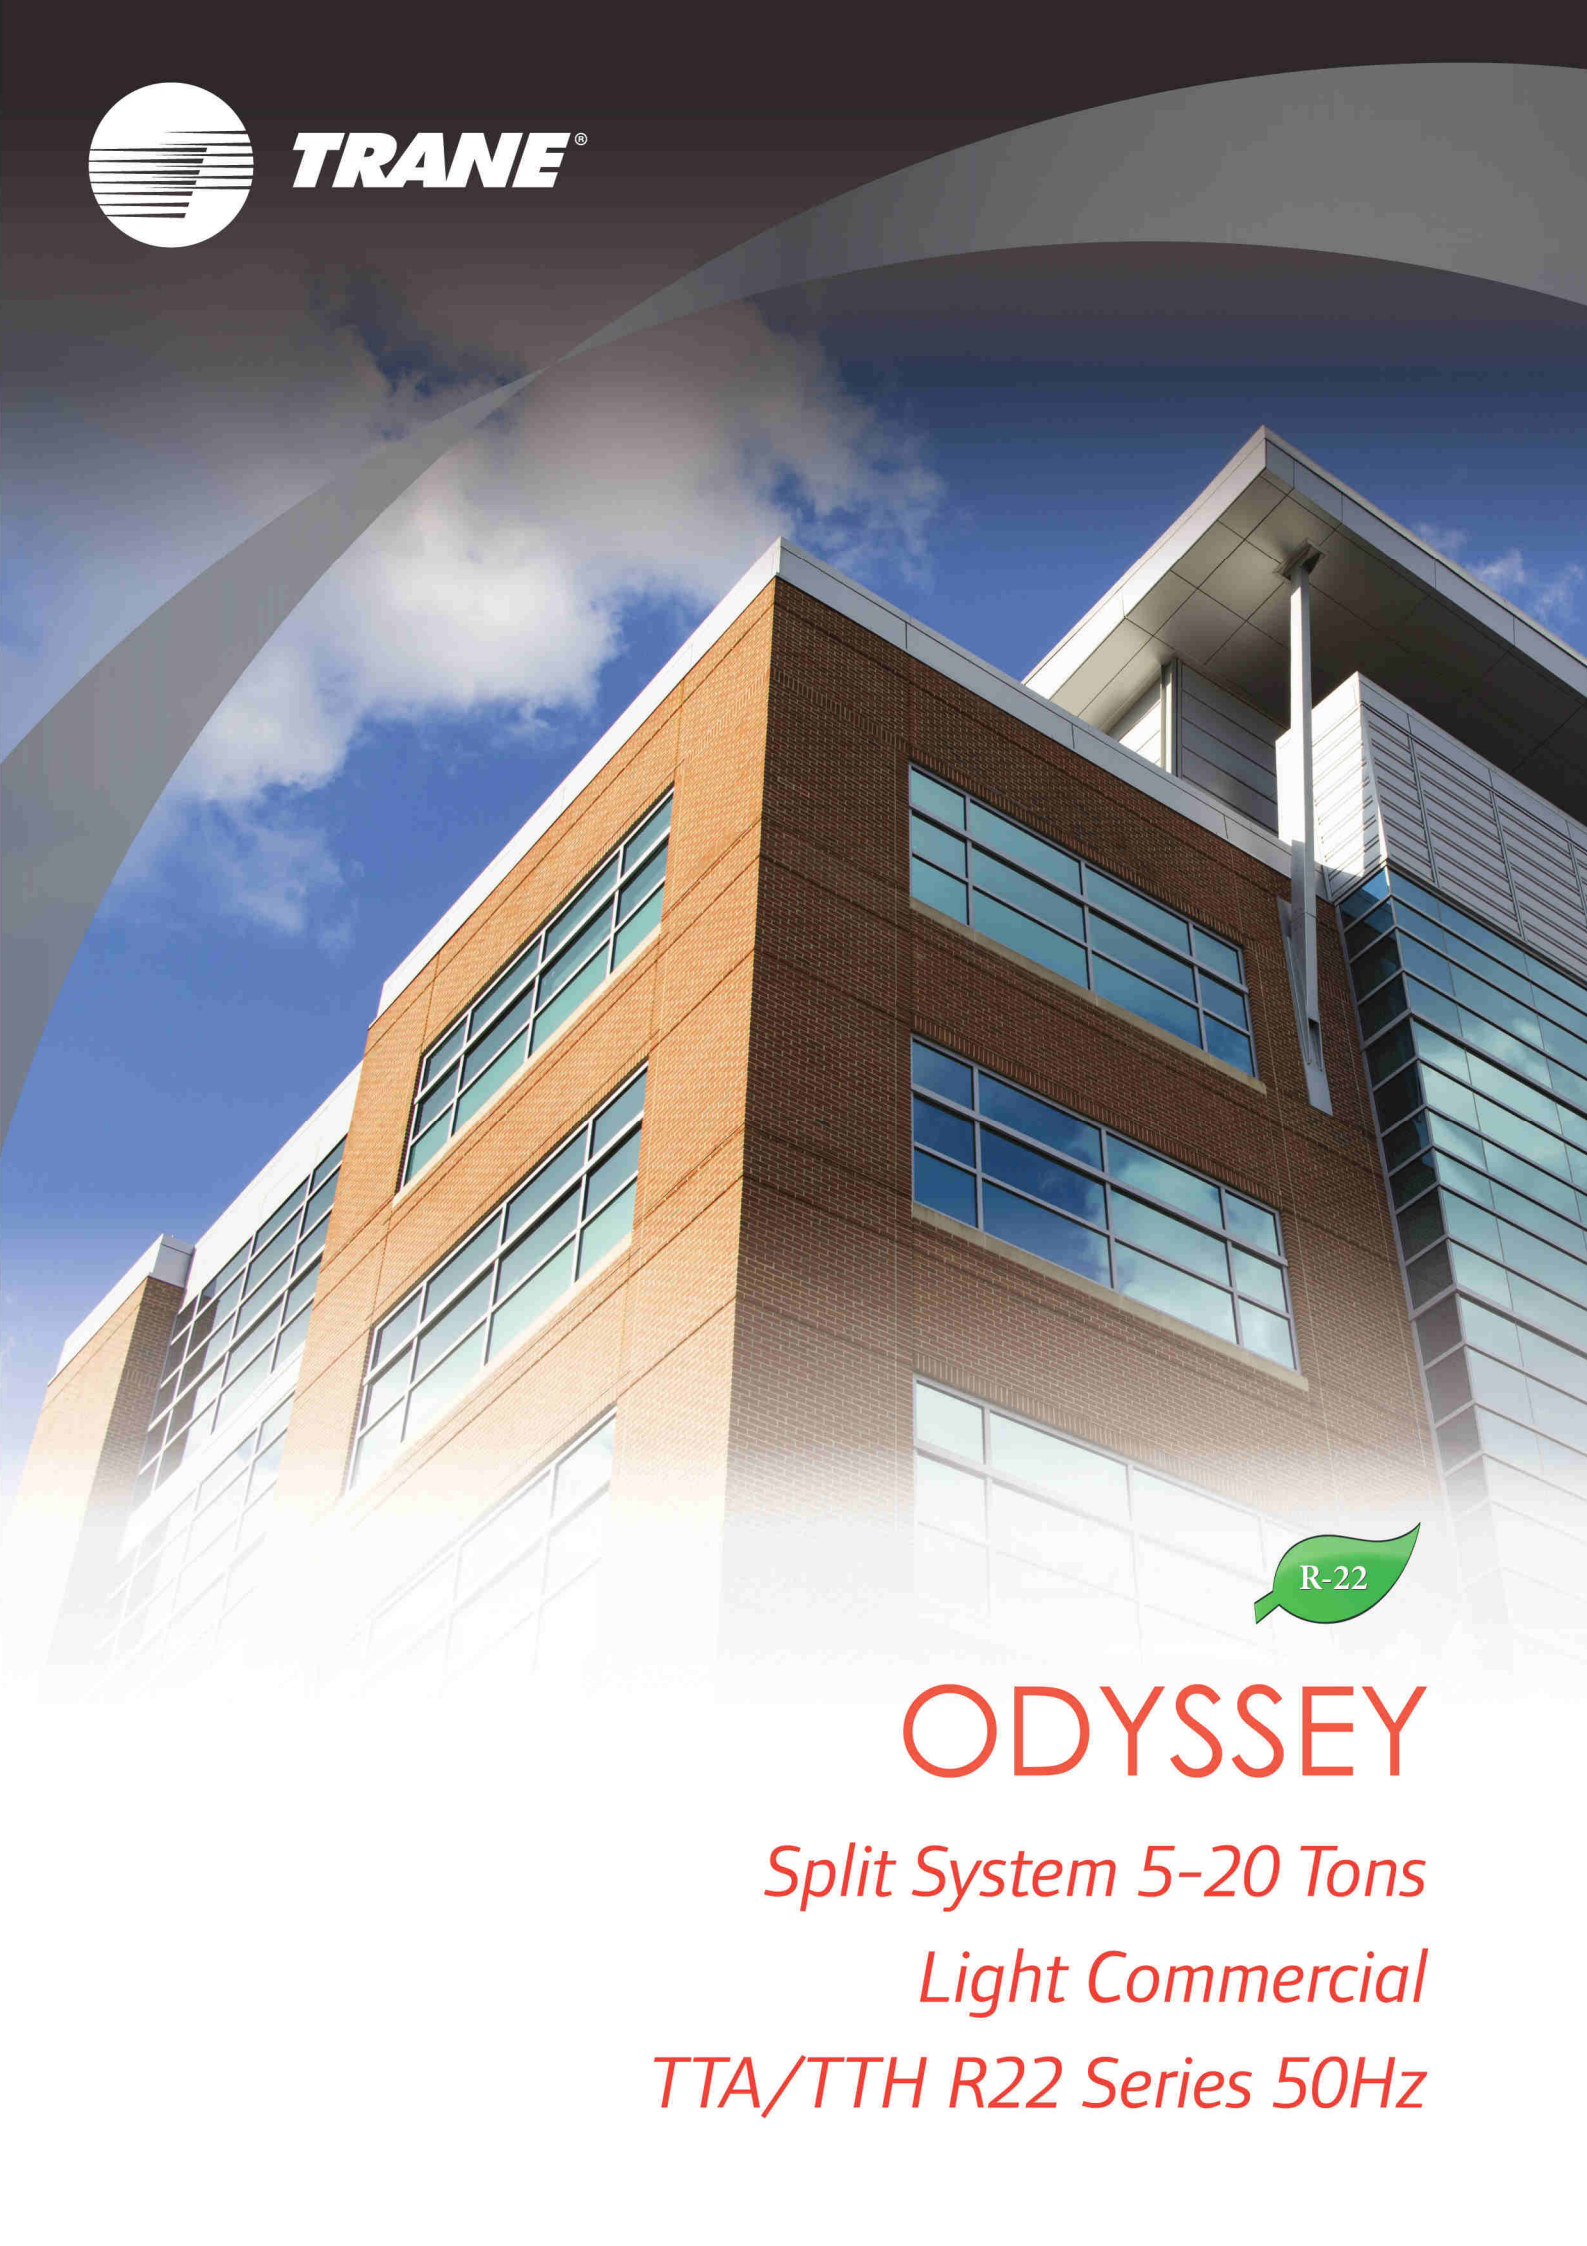

ODYSSEY

Split System 5-20 Tons

Light Commercial

TTA/TTH R22 Series 50Hz



ODYSSEY – Light Commercial Split System Cooling Units

A new standard for the air conditioning industry, Trane sets new appearance and new standard for Serviceability... Installability... Reliability... and Flexibility for all applications in split system air conditioning.



Design for You

Trane consulted its customers during the split system design phase to bring a product to the market place which would meet job needs every time.

Quality and Reliability

- Scroll compressors are available from 5 to 20 tons with excellent reliability and high efficiency.
- All units are 100 percent run tested prior to leaving the production line.

Manifolding Scroll Compressors (TTA180-240RD)

- The key to this system is an oil equalized line connecting the two compressors. In addition, the discharge lines are simply manifolded together.
- Efficiency and proven Technology. A manifolded set of compressors is more efficient at part load than the compressors with independent circuits.
- Manifolded to be single circuit provides cost and time saving for installation.

Maximum Efficiency

- Lower noise operation and higher efficiency with the new generation higher EER Scroll Compressor.
- 64% fewer parts than a comparable capacity reciprocating compressor.
- Single rotating assembly minimizes the friction and mechanical losses.
- Smooth operation, similar to a centrifugal compressor, give low torque variation and extend motor life, and minimal vibration reducing wear.
- Solid mount with no internal suspension to be worn out.
- Integral inlet dirt separator removes contaminants.

- Rolling element bearings for higher efficiency reduced friction. No suction or discharge valves for improved efficiency compared to a reciprocating compressor.

Flexibility

Trane Split System offers single and dual compressors allowing the right equipment to be matched to the job application and save on operating cost.

Convertibility (Option)

Trane air handler (TWE Model) can easily be converted for vertical or horizontal airflow in free blow and ducted applications. Please refer to TWE specification sheet for your further reference if needed.

Ease of Service

- Reduction of service time and cost through
 - Single side access on condenser.
 - Multiple removable panels on air handlers.
 - Colored and numbered wiring.
 - Service valves.

Trane Split System Units

- A reputation for quality and reliability.
- Improvements in efficiency, flexibility and installation.

System Performance Matrix

| Model | | Evaporator cfm | Total Capacity MBH | Sensible Capacity MBH |
|----------|----------|-------------------|-----------------------|--------------------------|
| Outdoor | Indoor | | | |
| TTK060QD | TTH060BD | 1,600 | 57 | 36 |
| | | 2,000 | 60 | 39 |
| | | 2,400 | 62 | 42 |
| TTA075RD | TTH075BD | 2,000 | 72 | 45 |
| | | 2,500 | 75 | 49 |
| | | 3,000 | 78 | 52 |
| TTA100RD | TTH100BD | 2,700 | 97 | 63 |
| | | 3,400 | 101 | 69 |
| | | 4,100 | 104 | 73 |
| TTA120RD | TTH120BD | 3,200 | 114 | 74 |
| | | 4,000 | 120 | 82 |
| | | 4,800 | 124 | 88 |
| TTA150RD | TTH160BD | 4,300 | 150 | 106 |
| | | 5,300 | 155 | 117 |
| | | 6,300 | 161 | 124 |
| TTA180RD | TTH180BD | 4,800 | 172 | 111 |
| | | 6,000 | 180 | 121 |
| | | 7,200 | 186 | 131 |
| TTA200RD | TTH210BD | 5,600 | 195 | 137 |
| | | 7,000 | 201 | 151 |
| | | 8,400 | 209 | 162 |
| TTA240RD | TTH240BD | 6,400 | 228 | 141 |
| | | 8,000 | 241 | 152 |
| | | 9,600 | 252 | 162 |

Note: Product design and specification are subject to change without notice.



Designed With Your Needs In Mind

General Data-Air Handler Units

| UNIT MODELS | | TTH060BD | TTH075BD | TTH100BD | TTH120BD | TTH160BD | TTH180BD | TTH210BD | TTH240BD |
|-----------------------------|---------|--|-----------------|-------------------|-------------------|------------------------------|---------------------|---------------------|---------------------|
| POWER CONNECTION | V/ph/Hz | 380-415/3/50 | 380-415/3/50 | 380-415/3/50 | 380-415/3/50 | 380-415/3/50 | 380-415/3/50 | 380-415/3/50 | 380-415/3/50 |
| MCA ¹ | A | 1.8 | 2.5 | 4.6 | 4.6 | 4.6 | 6.4 | 6.4 | 10.0 |
| SYSTEM DATA | | | | | | | | | |
| Refrigerant Type | | R22 | R22 | R22 | R22 | R22 | R22 | R22 | R22 |
| No. Refrigerant Circuits | | 1 | 1 | 1 | 1 | 1 | 2 | 2 | 2 |
| Refrigerant Connection Type | | BRAZE | BRAZE | BRAZE | BRAZE | BRAZE | BRAZE | BRAZE | BRAZE |
| Suction Line OD | in (mm) | 1 1/8 (28.57) | 1 1/8 (28.57) | 1 3/8 (34.93) | 1 3/8 (34.93) | 1 5/8 (41.3) | 1 3/8 (34.93) | 1 3/8 (34.93) | 1 3/8 (34.93) |
| Liquid Line OD | in (mm) | 3/8 (9.53) | 1/2 (12.7) | 1/2 (12.7) | 1/2 (12.7) | 5/8 (15.9) | 1/2 (12.7) | 1/2 (12.7) | 1/2 (12.7) |
| COIL | | | | | | | | | |
| Fin Type | | UNCOATED SLIT | UNCOATED SLIT | UNCOATED SLIT | UNCOATED SLIT | UNCOATED SLIT | UNCOATED SLIT | UNCOATED SLIT | UNCOATED SLIT |
| Fins per inch | | 15 | 15 | 15 | 15 | 14 | 14 | 14 | 14 |
| Refrigerant Flow Control | | Cap.Tube. | | | | Thermostatic Expansion Valve | | | |
| Drain Connection Size | in (mm) | 1 (25.4) | 1 (25.4) | 1 (25.4) | 1 (25.4) | 1 (25.4) | 1 (25.4) | 1 (25.4) | 1 (25.4) |
| Drain Connection Type | | STEEL PIPE - MPT | | | | | | | |
| FAN | | | | | | | | | |
| Fan Type | | DOUBLE INLET CENTRIFUGAL WITH FORWARD CURVED WHEEL | | | | | | | |
| Qty | | 1 | 1 | 2 | 2 | 2 | 2 | 2 | 2 |
| Drive Type | | BELT-DRIVE | | | | | | | |
| MOTOR | | | | | | | | | |
| Qty | | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Motor Output | hp (kW) | 3/4 (0.55) | 1 (0.75) | 2 (1.5) | 2 (1.5) | 2 (1.5) | 3 (2.2) | 3 (2.2) | 5 (3.7) |
| No. of Speed | | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Motor Speed | rpm | 1405 | 1400 | 1405 | 1405 | 1405 | 1425 | 1425 | 1440 |
| RLA | | 1.61 | 1.99 | 3.66 | 3.66 | 3.66 | 5.08 | 5.08 | 8.03 |
| FILTER | | | | | | | | | |
| Type | | WASHABLE AIR FILTER | | | | | | | |
| DIMENSION (HxWxD) | | | | | | | | | |
| Unit (Net) | mm | 520 x 1,406 x 916 | 520x1,406 x 916 | 520 x 1,774 x 916 | 620 x 1,774 x 916 | 798 x 2,059x 1,260 | 798 x 2,059 x 1,260 | 850 x 2,440 x 1,515 | 850 x 2,440 x 1,515 |
| WEIGHT | | | | | | | | | |
| Unit (Net) | kg | 87 | 92 | 136 | 141 | 180 | 189 | 214 | 225 |

¹ MCA - Minimum Circuit Ampacity
 Note : Product design and specification are subject to change without notice.

General Data - Condensing Units

| UNIT MODELS | | TTK060QD | TTA075RD | TTA100RD | TTA120RD | TTA150RD | TTA180RD | TTA200RD | TTA240RD |
|-------------------------------|---------|--------------------|-------------------|-------------------|-------------------|-------------------|--------------------|--------------------|--------------------|
| POWER CONNECTION | V/ph/Hz | 380-415/3/50 | 380-415/3/50 | 380-415/3/50 | 380-415/3/50 | 380-415/3/50 | 380-415/3/50 | 380-415/3/50 | 380-415/3/50 |
| MCA ¹ | A | 13.95 | 17.94 | 25.20 | 27.08 | 31.45 | 34.58 | 48.98 | 53.93 |
| SYSTEM DATA | | | | | | | | | |
| Refrigerant Type ² | | R22 | R22 | R22 | R22 | R22 | R22 | R22 | R22 |
| Refrigerant Connection Type | | BRAZE | BRAZE | BRAZE | BRAZE | BRAZE | BRAZE | BRAZE | BRAZE |
| No of Refrigerant Circuit | | 1 | 1 | 1 | 1 | 1 | 1* | 1* | 1* |
| Suction Line OD ³ | in (mm) | ** | 1 1/8 (28.6) | 1 3/8 (34.9) | 1 3/8 (34.9) | 1 5/8 (41.3) | 1 5/8 (41.3) | 1 5/8 (41.3) | 1 5/8 (41.3) |
| Liquid Line OD ³ | in (mm) | ** | 1/2 (12.7) | 1/2 (12.7) | 1/2 (12.7) | 5/8 (15.9) | 5/8 (15.9) | 5/8 (15.9) | 5/8 (15.9) |
| COMPRESSOR | | | | | | | | | |
| Compressor Type | | Hermetic Scroll | | | | | | | |
| Qty | | 1 | 1 | 1 | 1 | 1 | 2 | 2 | 2 |
| RLA | | 10.0 | 13.5 | 19.2 | 20.7 | 24.2 | 14.3 | 20.7 | 22.9 |
| COIL | | | | | | | | | |
| Fin Type | | Uncoated Corrugate | | | | | | | |
| Fins per inch | | 17 | 16 | 16 | 16 | 16 | 16 | 16 | 16 |
| FAN | | | | | | | | | |
| Fan Type | | Propeller | Propeller | Propeller | Propeller | Propeller | Propeller | Propeller | Propeller |
| Qty | | 2 | 1 | 1 | 1 | 1 | 2 | 2 | 2 |
| Drive Type | | Direct | Direct | Direct | Direct | Direct | Direct | Direct | Direct |
| MOTOR | | | | | | | | | |
| Qty | | 2 | 1 | 1 | 1 | 1 | 2 | 2 | 2 |
| Motor Output | Watt | 165 | 290 | 300 | 300 | 300 | 300 | 300 | 300 |
| No. of Speed | | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| RLA | | 0.88 | 1.06 | 1.2 | 1.2 | 1.2 | 1.2 | 1.2 | 1.2 |
| DIMENSION (HxWxD) | | | | | | | | | |
| Unit (Net) | mm | 1,254 x 988 x 350 | 1050 x 950 x 1060 | 1050 x 950 x 1060 | 1050 x 950 x 1060 | 1250 x 950 x 1060 | 1050 x 2200 x 1050 | 1050 x 2200 x 1050 | 1050 x 2200 x 1050 |
| WEIGHT | | | | | | | | | |
| Unit (Net) | kg | 94 | 164 | 180 | 192 | 245 | 415 | 428 | 462 |

¹ MCA - Minimum Circuit Ampacity.
² Refrigerant R22 is holding charged for TTA and fully charged for TTK.
³ Piping connections for TTK060QD are 7/8 inch suction line and 1/2 inch liquid line for Thailand only.
 Piping connections for TTK060KD are 3/8 inch suction line and 1 1/8 inch liquid line for export.
 * For TTA180-240RD, dual refrigerant circuit are standards for export.
 Note : Product design and specification are subject to change without notice.



TTA075-150RD



TTA075-120RD (Option)



TTA180-240RD



Phase Protector



TTH Model



TWE Model (Option)



Trane Multi-Stage Thermostat (Option)



1, 2, 4 Stage Thermostat - Digital Display (Option)



1 or 2 Stage Thermostat - Without Display (Option)



AHU Starter Panel/Smart Starter (Option)

Features and Benefits

TTA Condensing Units

Standard Features

- Powder paint finish.
- Innovative cabinet design.
- Refrigerant accessories as standard.
- Single and dual compressors
- Digital under / over voltage and phase protection device

Optional

- Stainless casing / Copper fin / Blue fin
- Dual circuits (Thailand) or manifolding single circuit (Export) for TTA150-240
- Horizontal air discharge (for TTA075-120)
- Wire Guard.

TTH/TWE Air Handler Units

Standard Features

- 500 mm in height (TTH075-100).
- Excellent drain pan.
- Belt drive.
- Factory installed mounting channel (TTH060-240).
- Quiet operation.
- Thermal expansion valve.

Optional

- TWE model as vertical configuration application (as option for TTH120-240)
- Discharge Plenum.
- Return air grille (for TWE model only).
- High static motor.
- Stainless casing / Copper fin / Blue fin

Trane Multi-Stage Thermostat controlled by micro processor is available for 1, 2 and 4 stage monitor, 7-segment display, 15°C-30°C temperature setting, connectable with the external sensor & auto-restart function with ON/OFF switch.

Trane 1,2,4 Stage Thermostat provides with & without display, operation control of chilled water fan coil and AHU, 16°C - 30°C temperature setting, 4-level compressor monitor & display of compressor status.

Benefits

- Full covering of all edges and a uniform paint finish for a smooth, attractive and durable cabinet exterior.
- The most attractive light commercial condensing unit available.
- Each unit ships standard with the liquid and suction lines shut-off valve, hi-low pressure controls, liquid line filter drier.
- Optimized operation and reduced service time.
- Protect compressor damage from unstable electrical source or mis-phase connection
- Designed to provide corrosion protection on sea coast application.
- Dual circuits allow for comfort during service time.
- Flexible application when vertical space limited.
- Protect coil from delivery damage.

Benefits

- Designed to fit easily into tight ceiling spaces.
- Specially designed drain pan with a deep pitch to catch and drain water safely away.
- Fully adjustable airflow for application versatility and ease of servicing.
- Supports the unit from below, and saves time and money for the installer.
- Well-insulated cabinet with fire retardant Polyethylene foam and wide forward curved fans.
- For maximum application flexibility and performance, capacity modulation provides improved comfort and backup in the event of a malfunction with one circuit.
- Provide more application flexibility
- Designed for free blow application.
- For high static pressure applications.
- Designed to provide corrosion protection on sea coast application.

Trane AHU Starter Panel/Smart Starter

Particularly controls the HVAC system. Integrated with motor and compressor protection system and temperature control, reliable according to UL/IEC/NEMA standard and easy to install.



Ingersoll Rand (NYSE:IR) advances the quality of life by creating comfortable, sustainable and efficient environments. Our people and our family of brands—including Club Car®, Ingersoll Rand®, Thermo King® and Trane®—work together to enhance the quality and comfort of air in homes and buildings; transport and protect food and perishables; and increase industrial productivity and efficiency. We are a \$12 billion global business committed to a world of sustainable progress and enduring results. For more information, visit www.tranethailand.com

เทรน (ประเทศไทย)

เลขที่ 1126/2 ชั้น 30-31 อาคารจวานิช 2 ถ.เพชรบุรีตัดใหม่ แขวงมักกะสัน เขตราชเทวี กรุงเทพฯ 10400

☎ 0-2761-1111

@2017 Trane All rights reserved

SSA5-SLB001-EN January 9, 2017

